



N. LEVENTERIS S.A.

32 ASKLIPIOU str. GR-18545 PIRAEUS - GREECE

TEL : +30 210 4220581 (12 LINES)


FAX : +30 210 4172142

www.leventeris.gr

E-MAIL: levederi@otenet.gr

STEEL ROPES with fiber core 6 x 36 WARRINGTON SEALE (DIN 3064)

$$6 \times (1 + 7 + (7+7) + 14)$$

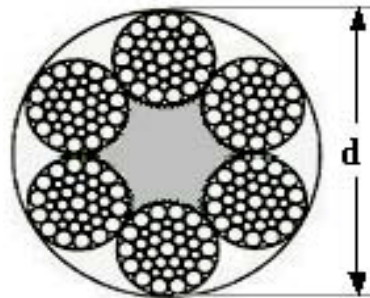

Nominal diameter & acceptable tolerance		Weight per meter	Calculated Breaking Force (CBF)				Minimum Breaking Force (MBF)			
			for wire nominal strength							
d mm	%	G1 kg/m ~	1570 N/mm ² (160 kp/mm ²)		1770 N/mm ² (180 kp/mm ²)		1570 N/mm ² (160 kp/mm ²)		1770 N/mm ² (180 kp/mm ²)	
			kN	kp	kN	kp	kN	kp	kN	kp
12		0,547	88,8	9.050	100	10.200	74,4	7.600	84,0	8.550
13	+5	0,643	104	10.600	117	11.900	87,4	8.920	98,3	10.000
14	-0	0,745	121	12.300	136	13.900	101	10.300	114	11.600
16		0,973	158	16.100	178	18.100	133	13.500	149	15.200
18	+5	1,23	200	20.400	225	22.900	168	17.100	189	19.200
20	-0	1,52	247	25.100	278	28.300	203	21.100	234	23.800
22		1,84	298	30.400	336	34.200	250	25.500	282	28.700
24	+5	2,19	355	36.200	400	40.700	298	30.400	336	34.200
26	-0	2,57	417	42.500	470	47.800	340	35.700	395	40.100
28		2,98	483	49.300	545	55.400	405	41.400	458	46.600
32	+5	3,89	631	64.300	712	72.400	530	54.000	598	60.800
36	-0	4,93	799	81.400	901	91.600	670	68.400	757	77.000
40		6,08	986	101.000	1.110	113.000	828	84.400	934	95.000
44	+5	7,36	1.190	122.000	1.350	137.000	1.000	102.000	1.130	115.000
48	-0	8,76	1.420	145.000	1.600	163.000	1.190	122.000	1.350	137.000
52	+5	10,3	1.670	170.000	1.880	191.000	1.400	143.000	1.580	161.000
56	-0	11,9	1.930	197.000	2.180	222.000	1.620	166.000	1.830	186.000

In case a steel core replaces the fiber core

1. The weight increases 10%
2. The CBF increases 16%
3. The MBF increases 8%