



N. LEVENTERIS S.A.

32 ASKLIPIOU str. GR-18545 PIRAEUS - GREECE

TEL : +30 210 4220581 (12 LINES)


FAX : +30 210 4172142

www.leventeris.gr

E-MAIL: levederi@otenet.gr

STEEL ROPES with 7 fiber cores 6 x 24 + 7HC (DIN 3068)

6 x (9 + 15)

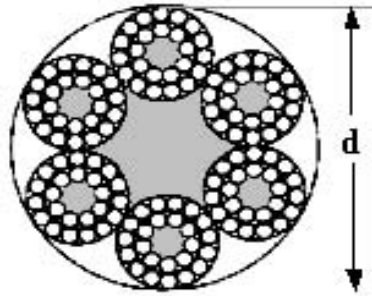

Nominal diameter & acceptable tolerance		Weight per meter	Calculated Breaking Force (CBF)				Minimum Breaking Force (MBF)			
			for wire nominal strength							
d mm	%	G kg/m	1570 N/mm ² (160 kp/mm ²)		1770 N/mm ² (180 kp/mm ²)		1570 N/mm ² (160 kp/mm ²)		1770 N/mm ² (180 kp/mm ²)	
			kN	kp	kN	kp	kN	kp	kN	kp
6	+8	0,115	-	-	20,5	2.090	-	-	17,9	1.820
7	-0	0,156	-	-	27,9	2.840	-	-	24,3	2.470
8		0,204	32,4	3.300	.	-	28,2	2.870	-	-
9	+7	0,258	41,0	4.170	.	-	35,6	3.630	-	-
10	-0	0,318	50,6	5.150	.	-	44,0	4.480	-	-
11		0,385	61,2	6.230	.	-	53,2	5.420	-	-
12	+7	0,458	72,8	7.420	.	-	63,3	6.450	-	-
13	-0	0,538	85,4	8.710	.	-	74,3	7.570	-	-
14		0,624	99,1	10.100	.	-	86,2	8.780	-	-
16	+7	0,815	129	13.200	.	-	113	11.500	-	-
18	-0	1,03	164	16.700	.	-	143	14.500	-	-
20		1,27	202	20.600	.	-	176	17.900	-	-
22	+7	1,54	245	24.900	.	-	213	21.700	-	-
24	-0	1,83	291	29.700	.	-	253	25.800	-	-
26		2,15	342	34.800	.	-	297	30.300	-	-
28	+7	2,50	396	40.400	.	-	345	35.100	-	-
32	-0	3,26	518	52.800	.	-	450	45.900	-	-
36		4,13	655	66.800	.	-	570	58.100	-	-
40	+7	5,09	809	82.400	.	-	704	71.200	-	-
44	-0	6,16	979	99.700	.	-	851	86.800	-	-
48		7,34	1.160	119.000	.	-	1.010	103.000	-	-
52	+7	8,61	1.370	139.000	.	-	1.190	121.000	-	-
56	-0	9,99	1.590	162.000	.	-	1.380	141.000	-	-