



## N. LEVENTERIS S.A.

32 ASKLIPIOU str. GR-18545 PIRAEUS - GREECE

TEL : +30 210 4220581 (12 LINES)


FAX : +30 210 4172142

[www.leventeris.gr](http://www.leventeris.gr)

E-MAIL: [levederi@otenet.gr](mailto:levederi@otenet.gr)

### STEEL ROPES with steel core 6 x 36 WARRINGTON SEALE ( DIN 3064 )

$$6 \times ( 1 + 7 + (7+7) + 14 )$$

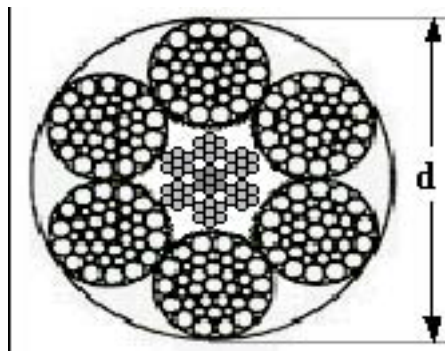

Nominal diameter & acceptable tolerance		Weight per meter	Calculated Breaking Force ( CBF )				Minimum Breaking Force ( MBF )			
			for wire nominal strength							
d mm	%	G2 kg/m ~	1570 N/mm <sup>2</sup> ( 160 kp/mm <sup>2</sup> )		1770 N/mm <sup>2</sup> ( 180 kp/mm <sup>2</sup> )		1570 N/mm <sup>2</sup> ( 160 kp/mm <sup>2</sup> )		1770 N/mm <sup>2</sup> ( 180 kp/mm <sup>2</sup> )	
			kN	kp	kN	kp	kN	kp	kN	kp
12		0,602	103	10.500	116	11.800	80,6	8.210	89,9	9.230
13	+5	0,707	121	12.300	136	13.900	94,6	9.630	106	10.800
14	-0	0,820	140	14.300	158	16.100	109	11.200	124	12.600
16		1,07	183	18.700	206	21.000	143	14.600	161	16.400
18	+5	1,35	232	23.600	261	26.600	181	18.500	204	20.800
20	-0	1,67	286	29.200	323	32.800	221	22.800	252	25.600
22		2,02	346	35.300	390	39.700	271	27.600	304	31.000
24	+5	2,41	412	42.000	464	47.200	322	32.800	363	36.900
26	-0	2,83	483	49.300	545	55.400	378	38.500	425	43.300
28		3,28	561	57.100	632	64.300	438	44.700	493	50.300
32	+5	4,28	732	74.600	826	84.000	571	58.400	644	65.700
36	-0	5,42	927	94.500	1.040	106.000	724	73.900	816	83.100
40		6,69	1.140	117.000	1.290	131.000	894	91.200	983	103.000
44	+5	8,10	1.380	141.000	1.560	159.000	1.080	110.000	1.220	124.000
48	-0	9,64	1.650	168.000	1.860	189.000	1.290	131.000	1.450	148.000
52	+5	11,3	1.930	197.000	2.180	222.000	1.510	154.000	1.710	173.000
56	-0	13,1	2.240	229.000	2.530	257.000	1.750	179.000	1.980	201.000